





Pressure Gauge

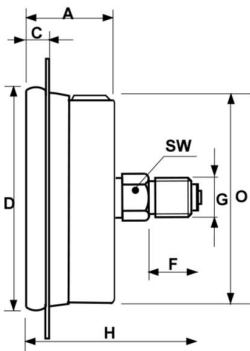

Type	NG	A	C	D	F	G	H	I	L	M	O	SW
TP-6117H	63	29	7,3	68,3	13	1/4 SAE	60	4,5	75	84,5	64	14
TP-6117L					10							

**High- and Low-Pressure Gauge glycerin-filled,
with back connection front panel mounting
2 scales for pressure bar + psi; 3 coloured scales for refrigerants**

Case:	AISI 304 stainless steel
Window:	Plexiglass
Ring:	AISI 304 stainless steel, polished
Socket:	1/4 SAE or 1/8 NPT, bottom, OT 58 brass
Elastic element:	Phosphor bronze
Movement:	Gearing, OT 59 brass
Dial:	White
Pointer:	Black oxidized aluminium
Range:	High pressure: -1/+38 bar / Low pressure: -1/+18 bar
Accuracy:	CL 1,6
Ambient-T :	+15 / +65°C
Process Fluid-T:	max. +65°C
Process Pressure:	max. 75% of full scale value
Over Pressure:	25% of full scale value
Blow-Out:	EPDM
Protection:	IP65 according DIN EN 60529 / IEC29